



海洋馆系列循环水泵

AQUARIUM SERIES FILTER PUMPS

ABSsalt



- Internal innovative design with big suction power.
- Simple design basket, easy to take out and install.
- Ultra quiet and Ip55 motor.
- Come with two standard DN40 unions easy to install.
- Special materials are used. With superior pressure up to 6kg/cm².
- Suitable for maximum hot water temperature up to 70°C.
- Tailor-made impeller and mechanical seal, suitable for long time use.



- 内部创新设计，自吸力大。
- 简易设计，隔发器易取出易安装。
- 超静音设计、IP55 电机。
- 配有两个标准 DN40 活接，易安装。
- 特种材料制泵体，可承压 6kg/cm²。
- 最高适用于 70°C 温泉。
- 特制叶轮，机械轴封，适合超长时间使用。



已注册外观与设计专利，仿冒必究！
Appearance and design patented,
counterfeiting not allowed!

适用于海水，承受压力**6kg/cm²**

Suitable for sea water, working pressure up to 6 kg/cm².

Specification and size:

技术参数及产品尺寸

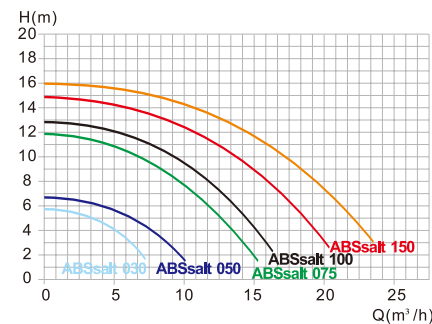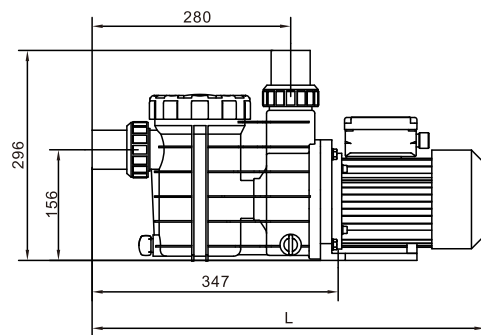

Model 型号	Voltage 额定电压	Power 额定功率		Inlet/Outlet 进出水口	Hmax 最大扬程	Qmax 最大流量	Length 长	Width 宽	Height 高
	(V)	KW	HP		(M)	(m³/h)	(mm)	(mm)	(mm)
ABSsalt-030	220V/50Hz	0.25	1/3	DN40	6	7	500	168	245
ABSsalt-050	220V/50Hz	0.37	1/2	DN40	7	10	500	168	245
ABSsalt-075	220V/50Hz	0.55	3/4	DN40	12	15	500	168	245
ABSsalt-100	220V/50Hz	0.75	1	DN40	13	16	500	168	245
ABSsalt-150	220V/50Hz	1.1	1 1/2	DN40	15	20	500	168	245

★ 110V/220V/380V,50/60Hz 可定制。
110V/220V/380V,50/60Hz pump can be customized.



海洋馆系列循环水泵

AQUARIUM SERIES FILTER PUMPS

AUsalt



- IP55 waterproof standard.
- Big flow rate.
- Ultra-quiet.
- Maximum working pressure up to 7 kg/cm².
- 316 stainless steel shaft.
- Graphite/ceramic mechanical seal.
- Suitable for maximum hot water temperature up to 70°C.



- IP55防水标准；
- 流量大；
- 超静音；
- 承压能力强，可达到7kg/cm²；
- 316不锈钢机轴；
- 石墨/陶瓷机械密封；
- 最高适用于70°C温泉。




已注册外观与设计专利，仿冒必究！
Patented Appearance Design,
Counterfeiting Is Prohibited!

适用于海水，承受压力**7kg/cm²**

Suitable for sea water, working pressure up to 7 kg/cm².

Specification and size:

技术参数及产品尺寸

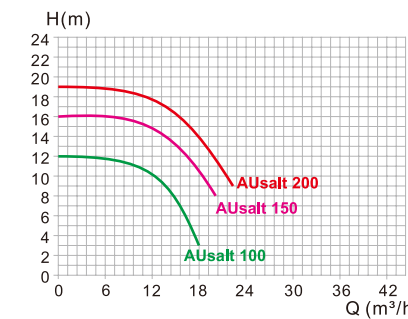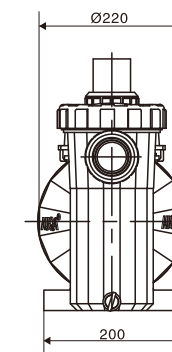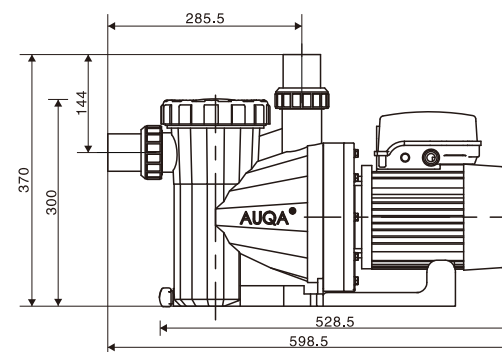

Model 产品型号	Voltage 额定电压	Connection Size 接口尺寸	Output power 输出功率	Weight 重量	L(mm) 长	W(mm) 宽	H(mm) 高
AUsalt 100	220V	50mm	0.75KW	15.2kg	528.5	220	300
AUsalt 150	220V	50mm	1.1KW	15.6kg	528.5	220	300
AUsalt 200	220V	50mm	1.5KW	16.0kg	528.5	220	300